



Goodtone

Poly



POLY Chair

Inspired by the geometric elements, the layered triangular patterns and 3d knitting techniques bring up multiple textures, presenting a three-dimensional effect. The use of colors full of vitality breaks the dull atmosphere, forms a strong visual impact, and leaves a unique style impression.

— Fuseproject



POLY-B

The meaning of Good design should more than just being a high price luxury product. GOODTONE has managed to produce Good design products that everyone can have with quality assurance.

- | | |
|--------------------------------------|--------------------------------|
| 1. Upholstery / 3D Mesh | 5. Mechanism / Steel |
| 2. Armrest / PU Inner Board、PA+30%GF | 6. Gas-lift / Steel |
| 3. Backrest / PA+35%GF、PA+30%GF | 7. Base / 360mm Aluminum Alloy |
| 4. Seat / PP+30%GF Moulded Foam | 8. Caster / Back PU |




PO-F03
Rich Coral




PO-F02
Cosmic Black



PO-F01
Soft White




PO-F04
Ultra Violet



PO-F05
Mineral Green





Installation

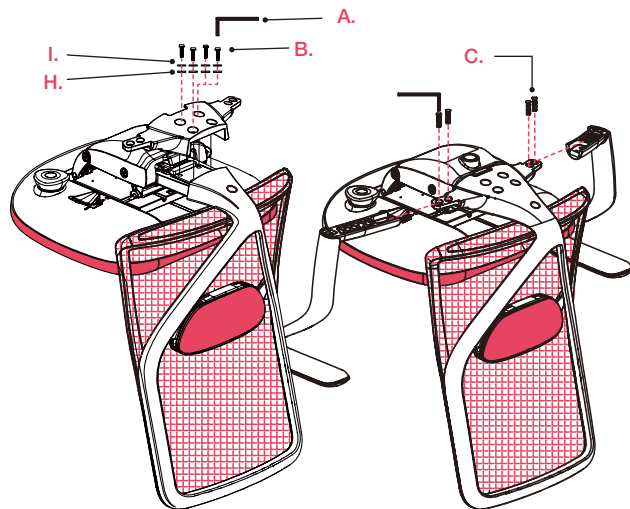

Step 1

Step 2

A	x1	B	x4	C	x4
					
M5		M8*35		M8*20	

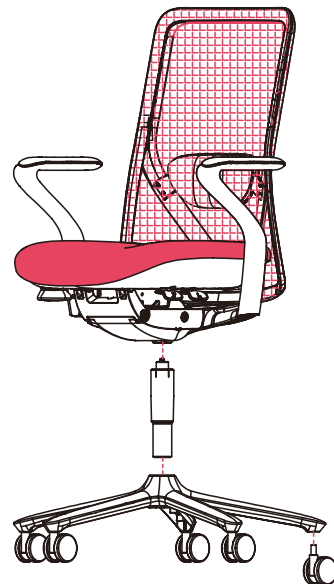

Step 3


H	x4	I	x4
			
Ø 8.5 Ø 17T2		Ø 8.5 Ø 14T2.5	



POLY-B

Height	975 - 1060mm
Seat depth	450 - 510mm
Seat width	500mm
Distance from floor to seat	440 - 525mm
Backrest width	430mm
Distance from seat to the top of backrest	520mm
Width between armrest	490mm
Distance from floor to armrest	625mm
From seat to armrest	195 - 255mm
Tilt angle degree	105° ~ 125°

1 Lumbar Support / At the back of the chair



Pull up or down the lumbar support by both hand at the same time

Lumbar support may result in relief of lower back pain especially in a long working hour.

2 Adjustable Armrest / Height adjustment



Pull up to increase height, vice versa pull down to lower height when highest point reached

Armrest can reduce tiredness to arms and shoulders.

3 Sliding Seat / Function key located on the left hand side of mechanism



↔ Pull out function key for sliding function

Adjust Sliding seat so that hips and knees are at a 90 degrees angle, it reduces tiredness.

4 Height Adjustment / Control rod on the right hand side of mechanism



↕ To lower seat, place your full weight on the chair, and engage actuator lever. When the desired height is reached, release the actuator.

To raise the seat, shift your weight to your feet. Engage actuator. Chair will rise automatically

Position chair so your feet are flat on the floor, and lower legs are at a 90-degree angle (or better) relative to upper legs.

5 Tension Tilt / Control rod on the right hand side of mechanism



Twirl outward to release tension



Twirl inward to increase tension

Tension tilt offers more secure and comfortable working environment.

6 Three Positions Tilt Lock / Control rod on the left hand side of mechanism



Pull out the control rod to unlock tilt function and adjust, relock control rod when desired angle reached

Tilt lock allows the user to sit in an upright position for keyboarding, while providing a comfortable rocking/reclining motion during work or break.

Leather office chair: Please gently wipe it with a half-wet sponge dipped with special detergents and service it with the leather servicing agent after wiping it dry with the dry cloth. If it is dipped with water, it should be immediately wiped dry. Besides, avoid the long-time direct sunlight.

Net surface and cloth office chair: Please slap with hand or use the dust collector to clean the dust on it. If there are stains, locally clean and dry it naturally with special detergents.

Armrest, support and chair leg: For aluminum alloy materials, please clean them with a dry cloth or nonferrous metal detergents; For plastic materials, please clean them with half-wet cloth dipped with clear water.

Chair wheel: Clean fur crumbs fiber and other sundries periodically and protect chair wheels with anti-static sprays.

Quality assurance and after-sales service

FIVE-YEAR QUALITY ASSURANCE

In case the product is damaged due to its quality reasons within five years from the purchasing date, the Buyer can show the purchasing proof and the Company will repair the product for free.



! Notice

The quality assurance service is not applicable for the improperly stored, assembled and used product, and does not include the damage to the product due to the normal abrasion and tearing, cutting and scraping or striking or accidents.



After opening the package of the product, please carefully check the product for part lack or transportation damage. If any, please contact the dealer timely.



Please place it on the indoor stable floor and prevent it from fire or exposure to blazing sun for a long time and humid environment.



The product can only be used by one person.



Please do not seat at the edge of the chair.



Please do not step on it or stand on the product to get something.



Please do not incline the chair backrest excessively.



Please do not lean against the product except in normal sitting posture to avoid tumbling due to the unbalance.



Please prevent the product from scratching or striking by sharp or hard tools.



Please notice the spontaneous loose phenomenon of bolts. If any, please stop using and repair the product immediately.

